



Comfort Series

SUBMITTAL DATA

TOP VIEW

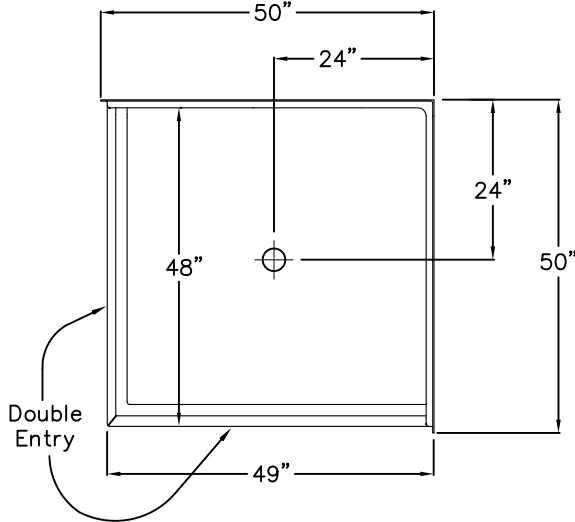

SIDE VIEW




Barrier Free Shower Pan

The shower pan shall be RBSB 4848 BF DE PAN 1.0, center drain. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mils, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 50" x 50" x 4 1/2". The one piece pan shall meet ANSI Z124.2, Home Innovation Research Lab, UPC, and shall meet the requirements of Southern Building Code.


The enclosure shall be equipped with the following installed accessories:

- 1) Low double entry 1.0" threshold,
- 2) Factory installed Easy Base self sustaining bottom.

FRONT VIEW

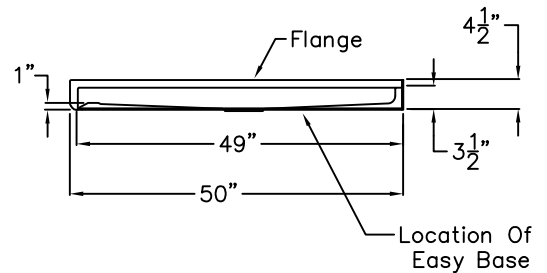

Detail of 1.0" Threshold

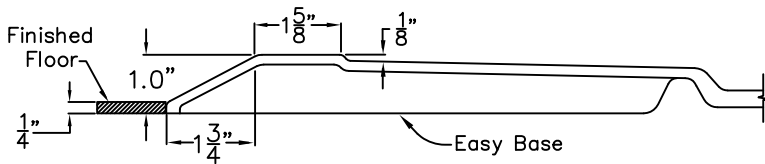

DUE TO THE NATURE OF THE MATERIALS
UNIT DIMENSIONS MAY VARY ± 1/2 INCH

Job Name:	Renovative Bath Systems		
Approved By Print Name:	Drawing#: RBSB 4848 BF DE CR 1.0 PAN Easy Base		
Approved By Signature:	Date Approved:	Date: 5-29-14	Revised: 6-25-14
Rep.:	Wholesaler:	Quote No.	

RENOVATIVE BATH SYSTEMS
Richmond Va.
1 800 441 8673